



FAST RECOVERY RECTIFIER

1N4933 THRU 1N4937

VOLTAGE RANGE
CURRENT


50 to 600 Volts
1.0 Ampere

FEATURES

- Fast Switching for high efficiency
- Low reverse leakage
- High forward surge current capability
- High Temperature soldering guaranteed:
260°C / 10 second, 0.375" (9.5mm) lead length

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Polarity: Color band denotes cathode end
- Mounting Position: any
- Weight: 0.012 ounce, 0.33 gram

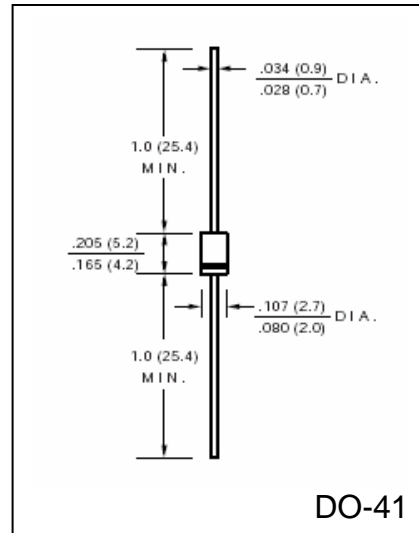

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	1N4933	1N4934	1N4935	1N4936	1N4937	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	Volts
Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length At $T_C = 75^\circ\text{C}$	$I_{(AV)}$	1.0					Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	30					Amps
Maximum Instantaneous Forward Voltage @ 1.0A	V_F	1.2					Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	I_R	5.0					μA
		100					
Maximum Reverse Recovery Time (Note 1)	t_{rr}	200					nS
Maximum Reverse Recovery Current (Note 1)	$I_{RM(REC)}$	2.0					Amps
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)	C_J	15					pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	50					$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	(-65 to +150)					$^\circ\text{C}$
Storage Temperature Range	T_{STG}	(-65 to +150)					$^\circ\text{C}$

Notes:

1. Reverse Recovery Test conditions: $I_R = 1.0\text{A}$, $V_R = 30\text{V}$, $di/dt = 50\text{A}/\mu\text{S}$, $I_{RR} = 10\% I_{RM}$
2. Thermal resistance from Junction to ambient at 0.375" (9.5mm) lead length mounted on PCB



RATINGS AND CHARACTERISTIC CURVES 1N4933 THRU 1N4937

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

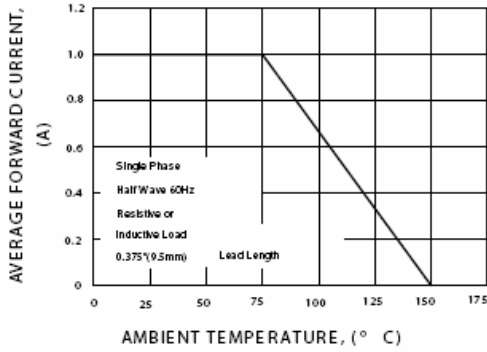


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

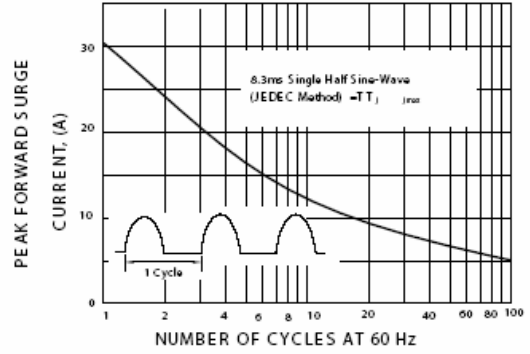


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

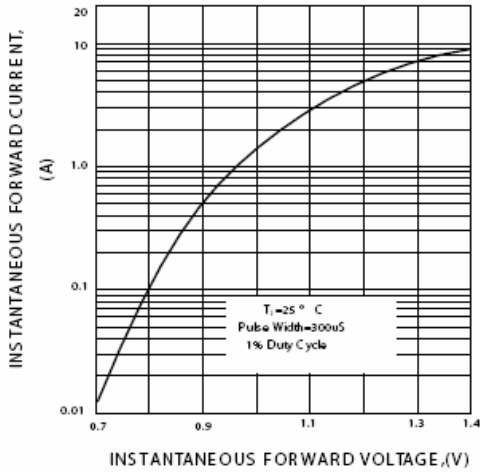


FIG.4-TYPICAL REVERSE CHARACTERISTICS

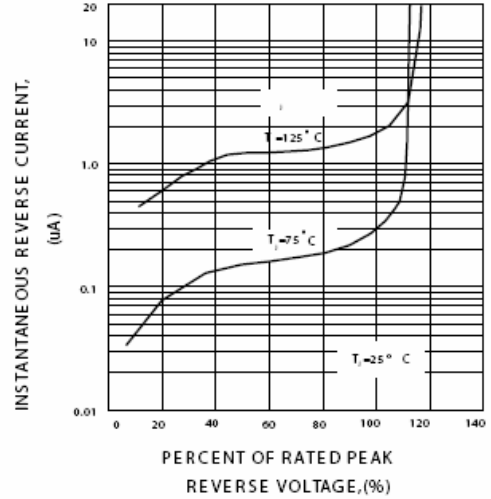


FIG.5-TYPICAL JUNCTION CAPACITANCE

