



## FAST RECOVERY RECTIFIER

**FR601S THRU FR607S**

**VOLTAGE RANGE  
CURRENT**


**50 to 1000 Volts  
6.0 Ampere**

### FEATURES

- Fast switching speed for high efficiency
- Low reverse leakage
- High forward surge current capacity
- High temperature soldering guaranteed:  
260 /10 seconds, 0.375" (9.5mm) lead length

### MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V – 0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: any
- Weight: 0.06 ounce, 1.70 gram

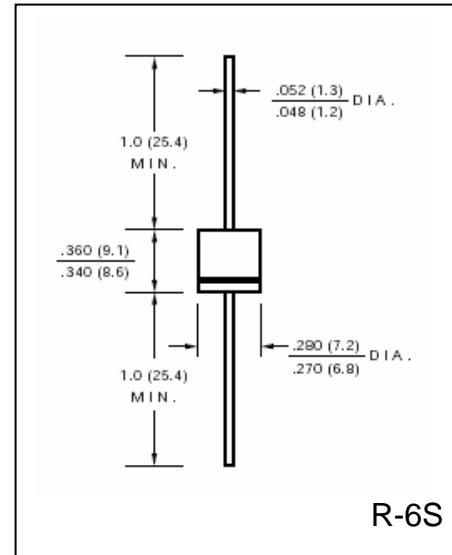

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	FR 601S	FR 602S	FR 603S	FR 604S	FR 605S	FR 606S	FR 607S	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length At $T_C = 75^\circ C$	$I_{(AV)}$	6.0						Amps	
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	$I_{FSM}$	250						Amps	
Maximum Instantaneous Forward Voltage @ 6.0A	$V_F$	1.3						Volts	
Maximum DC Reverse Current at Rated $T_A = 25^\circ C$ DC Blocking Voltage per element $T_A = 100^\circ C$	$I_R$	10.0						$\mu A$	
500									
Maximum Reverse Recovery Time Test conditions $I_F = 0.5A$ , $I_R = 1.0A$ , $I_{RR} = 0.25A$	$t_{rr}$	150			250	500	nS		
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)	$C_J$	100						pF	
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	10						$^\circ C/W$	
Operating Junction Temperature Range	$T_J$	(-55 to +150)						$^\circ C$	
Storage Temperature Range	$T_{STG}$	(-55 to +150)						$^\circ C$	

### Notes:

1. Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, PCB mounted

## RATINGS AND CHARACTERISTIC CURVES FR601S THRU FR601S

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

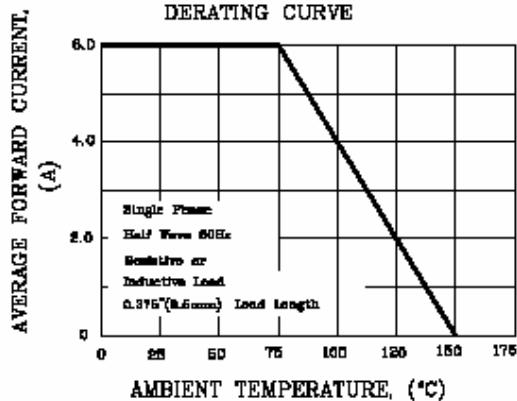


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

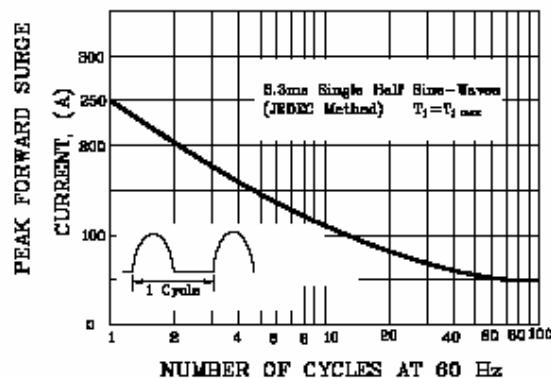


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

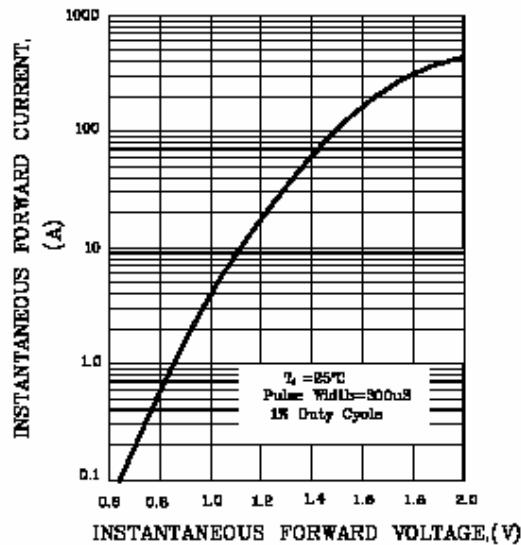


FIG.4-TYPICAL REVERSE CHARACTERISTICS

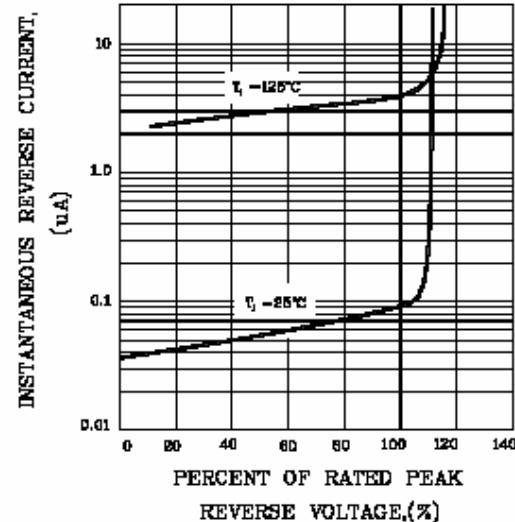


FIG.5-TYPICAL JUNCTION CAPACITANCE

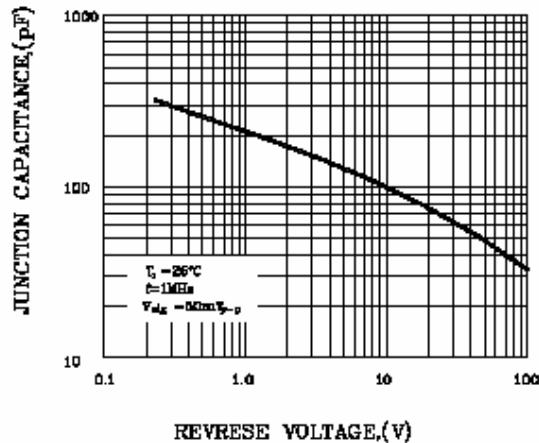


FIG.6-TYPICAL THERMAL RESISTANCE VS LEAD LENGTH

