



SINGLE PHASE BRIDGE RECTIFIER

MB4005 THRU MB4010

VOLTAGE RANGE
CURRENT

50 to 1000 Volts
40.0 Ampere

FEATURES


- High forward surge current capability
- Metal package provides low thermal resistance
- High isolation voltage from case to lugs
- High temperature soldering guaranteed:
260°C / 10 seconds

MECHANICAL DATA

- Case: Metal
- Terminal: Plated 0.25" (6.35mm) lug
- Polarity: Polarity symbols marked on case
- Mounting: Thru hole for #10 screw, 20 in-lbs Torque max.
- Weight: .084 ounce, 24.0 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

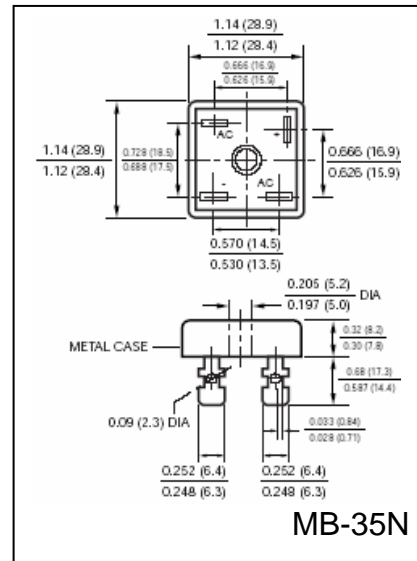

	SYMBOLS	BR 4005	BR 401	BR 402	BR 404	BR 406	BR 408	BR 4010	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, At $T_C = 50^\circ\text{C}$ (Note 1 and 2)	$I_{(AV)}$	40							Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	400							Amps
Rating for Fusing ($t < 8.3\text{mS}$)	I^2t	664							A^2s
Maximum Instantaneous Forward Voltage drop per Bridge element 20.0A	V_F	1.1							Volts
Maximum DC Reverse Current at Rated $T_A = 25^\circ\text{C}$	I_R	10							μA
DC Blocking Voltage per element $T_A = 100^\circ\text{C}$		1.0							mA
Isolation Voltage from case to lug	V_{ISO}	2500							Volts
Typical Thermal Resistance (Note 1 and 2)	$R_{\theta Jc}$	2.0							$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	(-65 to +150)							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	(-65 to +150)							$^\circ\text{C}$

Notes:

1. Unit mounted on 9" x 3.5" x 4.6" (23cm x 9cm x 11.8cm) AL finned plate
2. Bolt down on heat-sink with silicon thermal compound between bridge and mounting surface for maximum heat transfer efficiency with #10 screw



RATINGS AND CHARACTERISTIC CURVES MB4005 THRU MB4010

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

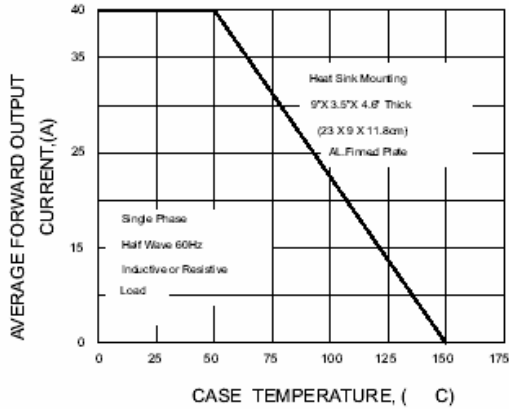


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER ELEMENT

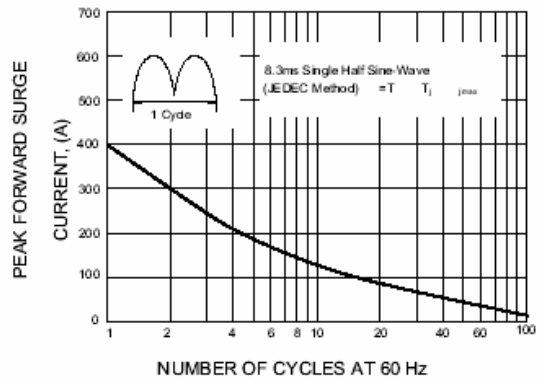


FIG.3-TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

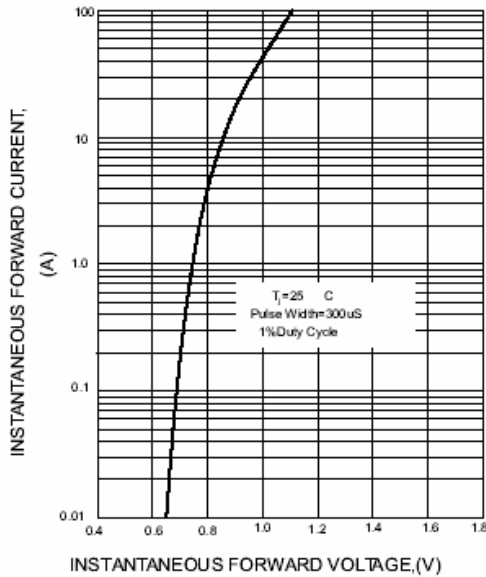


FIG.4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

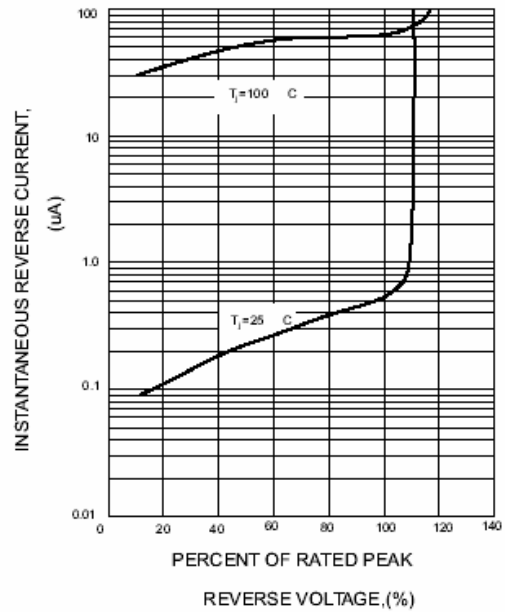


FIG.5-MAXIMUM POWER DISSIPATION

