



## GENERAL PURPOSE RECTIFIER

### P300A THRU P300M

VOLTAGE RANGE  
CURRENT


50 to 1000 Volts  
3.0 Ampere

#### FEATURES

- Low reverse leakage
- Glass passivated chip junction
- Low forward voltage
- High forward surge current capacity
- High temperature soldering guaranteed:  
260 /10 seconds, 0.375" (9.5mm) lead length

#### MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V – 0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: any
- Weight: 0.042 ounce, 1.19 gram

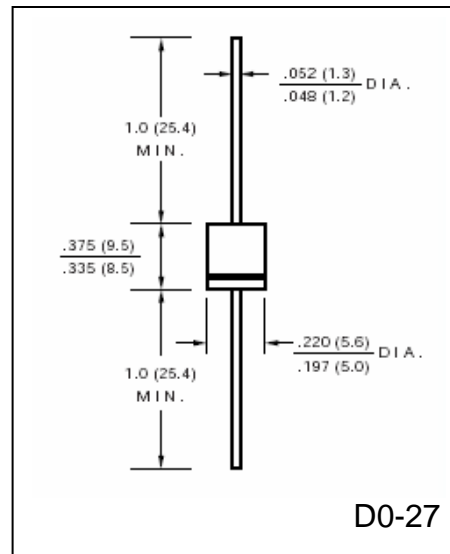

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	P300A	P300B	P300D	P300G	P300J	P300K	P300M	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length at $T_A = 55^\circ\text{C}$	$I_{(AV)}$	3.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	$I_{FSM}$	200							Amps
Maximum Instantaneous Forward Voltage @ 3.0A	$V_F$	1.0							Volts
Maximum DC Reverse Current at Rated $T_A = 25^\circ\text{C}$	$I_R$	10.0							$\mu\text{A}$
DC Blocking Voltage per element $T_A = 150^\circ\text{C}$		500							
Maximum Full Load Reverse Current, full cycle Average 0.375" (9.5mm) lead length at $T_L = 105^\circ\text{C}$	$I_{R(AV)}$	500							$\mu\text{A}$
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)	$C_J$	40							pF
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	30							$^\circ\text{C/W}$
Operating Junction Temperature Range	$T_J$	(-65 to +175)							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	(-65 to +175)							$^\circ\text{C}$

#### Notes:

1. Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, PCB mounted with 0.8" x 0.8" (20mm x 20mm) copper pads



# RATINGS AND CHARACTERISTIC CURVES P300A THRU P300M

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

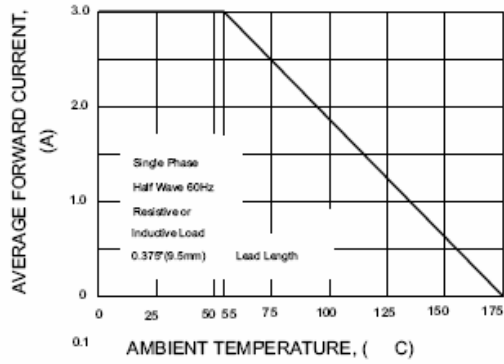


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

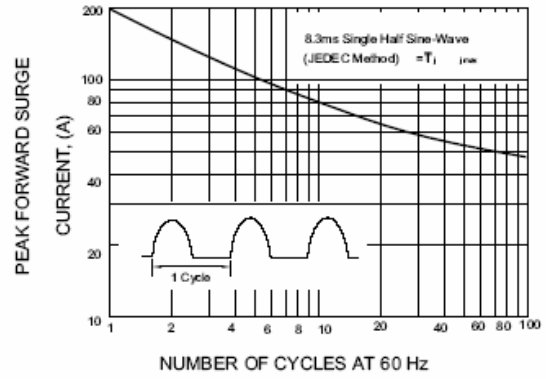


FIG.3-TYPICAL INSTANTANEOUS

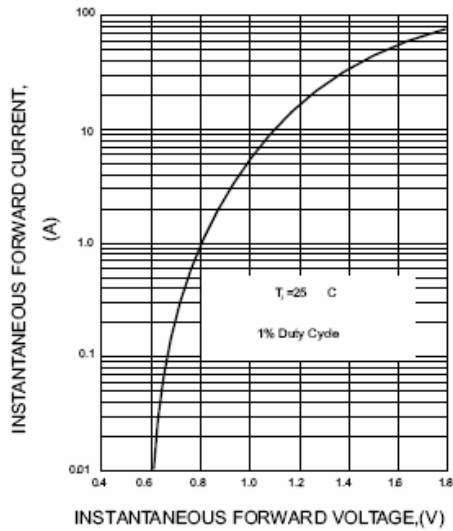


FIG.4-TYPICAL REVERSE CHARACTERISTICS

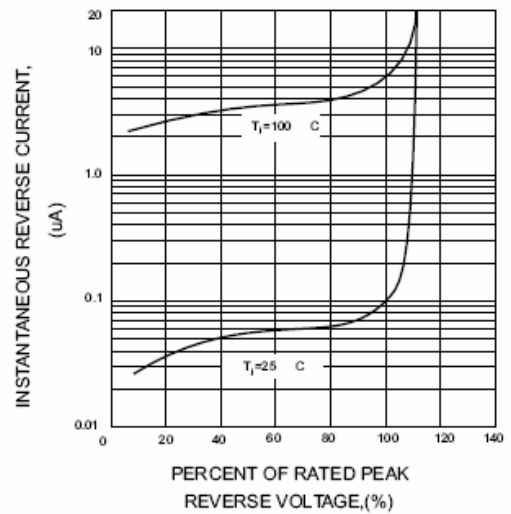


FIG.5-TYPICAL JUNCTION CAPACITANCE

