

**SURFACE MOUNT GLASS PASSIVATED JUNCTION RECTIFIER
RS1AB THRU RS1MB**


VOLTAGE RANGE 50 to 1000 Volts
Forward Current 1.0 Amperes

FEATURES

- For surface mounted applications in order optimize board space
- Low profile package
- Built –in strain relief, ideal for automated placement
- Plastic package has underwrites laboratory flammability classification 94v-0
- Fast switching speed
- Low forward voltage drop.
- Glass passivated chip junction
- High temperature soldering guaranteed:
250 °C/10 seconds at terminals

MECHANICAL DATA

- Case: JEDED SMA(DO-214AC) molded plastic body
- Terminals: Plated axial lead solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end .
- Mounting Position: Any.
- Weight: 0.002 ounce, 0.064 gram

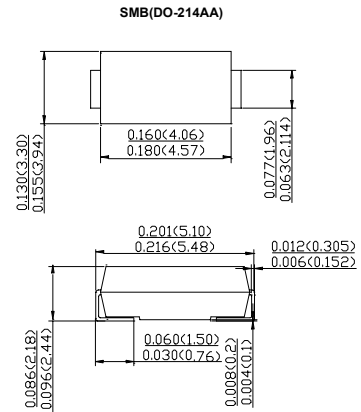

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load derate current by 20%.

	SYMBOLS	RS1AB	RS1BB	RS1DB	RS1GB	RS1JB	RS1KB	RS1MB	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, at $T_A=50^\circ C$	$I_{(AV)}$	1.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0							Amps
Maximum Instantaneous Forward Voltage at 1.0A	V_F	1.30							Volts
Maximum DC Reverse Current at rated DC blocking voltage at	$T_A=25^\circ C$	5.0							A
	$T_A=125^\circ C$	100							
Maximum Reverse Recovery Time (Note 1)	T_{RR}	150				250	500		nS
Typical junction capacitance (Note 2)	C_J	10					7.0		
Maximum Thermal Resistance (Note 3)	R_{QJA}	32.0							C/W
	R_{QJL}	105.0							
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							°C

NOTES:

- Test conditions : $I_F=0.5A$ $I_R=1.0A$ $I_{rr}=0.25A$
- Measured at 1MHZ and applied reverse voltage of 4.0 Vppls.
- Thermal resistance from junction to ambient and from junction to lead mounted on 0.2 0.2”(5.0 x 5.0mm) copper pad areas.

SURFACE MOUNT GLASS PASSIVATED JUNCTION RECTIFIER
RS1AB THRU RS1MB

VOLTAGE RANGE 50 to 1000 Volts
Forward Current 1.0 Amperes

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 — Forward Current Derating Curve

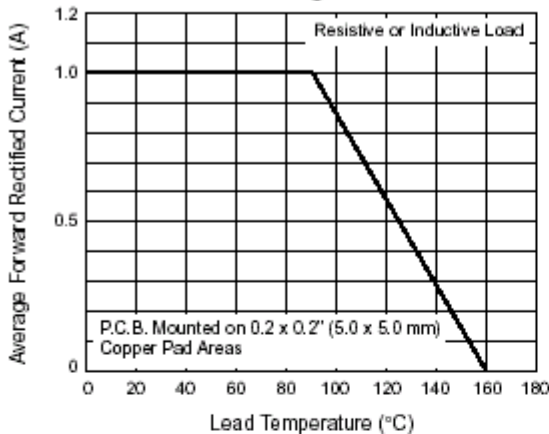


Fig. 2 — Maximum Non-Repetitive Peak Forward Surge Current

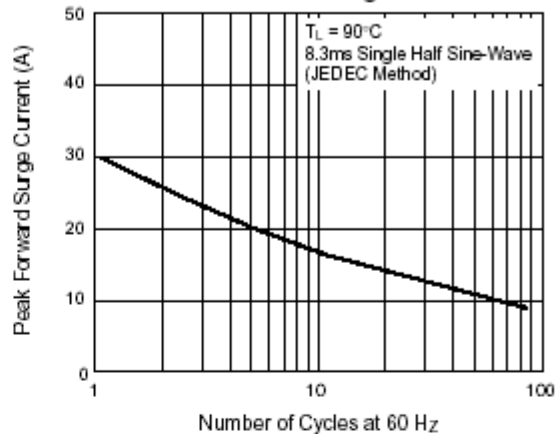


Fig. 3 — Typical Instantaneous Forward Characteristics

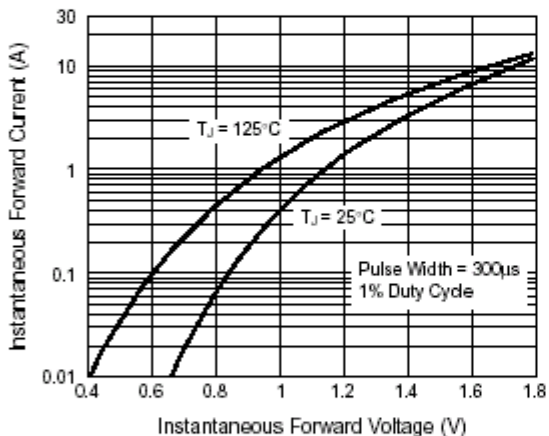


Fig. 4 — Typical Reverse Characteristics

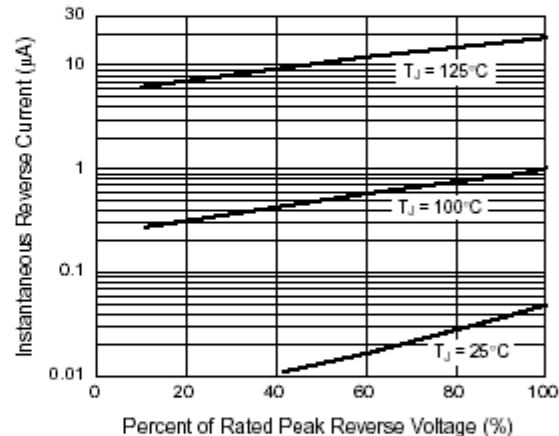


Fig. 5 — Typical Junction Capacitance

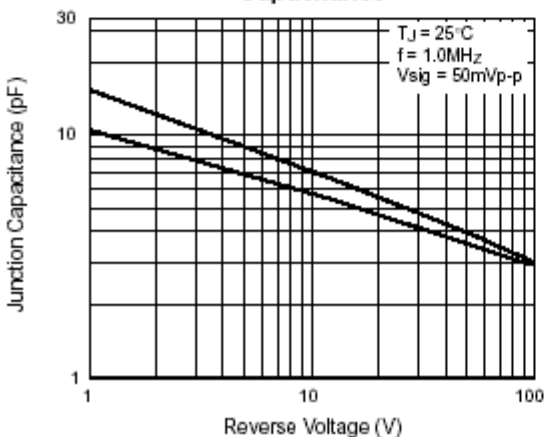


Fig. 6 — Typical Transient Thermal Impedance

