



ULTRA FAST GLASS PASSIVATED RECTIFIER

UF5001G THRU UF5007G

VOLTAGE RANGE
CURRENT


50 to 1000 Volts
5.0 Ampere

FEATURES

- Fast switching speed for high efficiency
- Glass passivated chip junction
- Low reverse leakage
- High forward surge current capacity
- High temperature soldering guaranteed:
260 /10 seconds, 0.375" (9.5mm) lead length

MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V – 0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: any
- Weight: 0.042 ounce, 1.19 gram

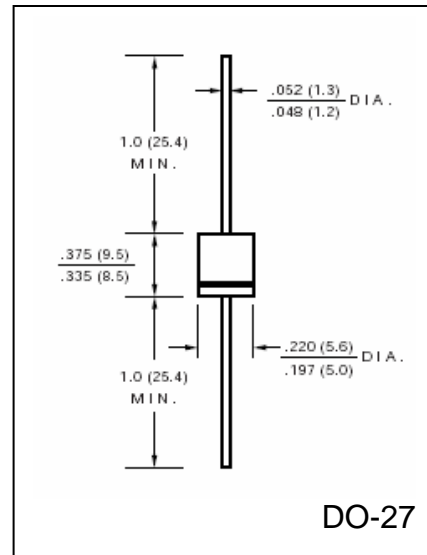

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	UF 5001G	UF 5002G	UF 5003G	UF 5004G	UF 5005G	UF 5006G	UF 5007G	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length At $T_A = 55^\circ C$	$I_{(AV)}$	5.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	150							Amps
Maximum Instantaneous Forward Voltage @ 5.0A	V_F	1.0			1.7				Volts
Maximum DC Reverse Current at Rated $T_A = 25^\circ C$	I_R	10							μA
DC Blocking Voltage per element $T_A = 125^\circ C$		250							
Maximum Reverse Recovery Time Test conditions $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$	t_{rr}	50			75				nS
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)	C_J	45							pF
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	20							$^\circ C/W$
Operating Junction Temperature Range	T_J	(-55 to +150)							$^\circ C$
Storage Temperature Range	T_{STG}	(-55 to +150)							$^\circ C$

Notes:

1. Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, PCB mounted



RATINGS AND CHARACTERISTIC CURVES UF5001G THRU UF5007G

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

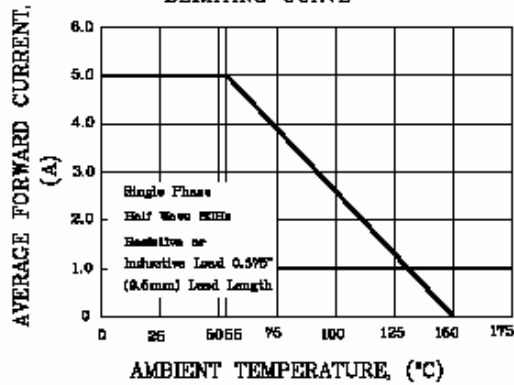


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

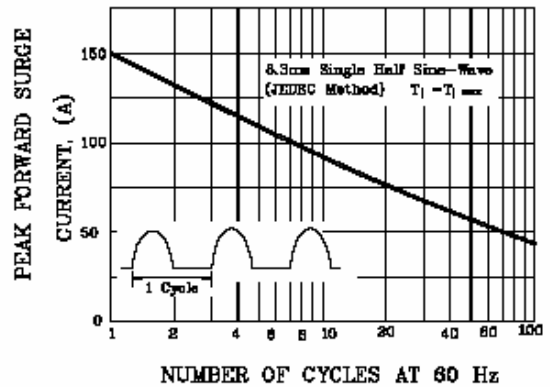


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

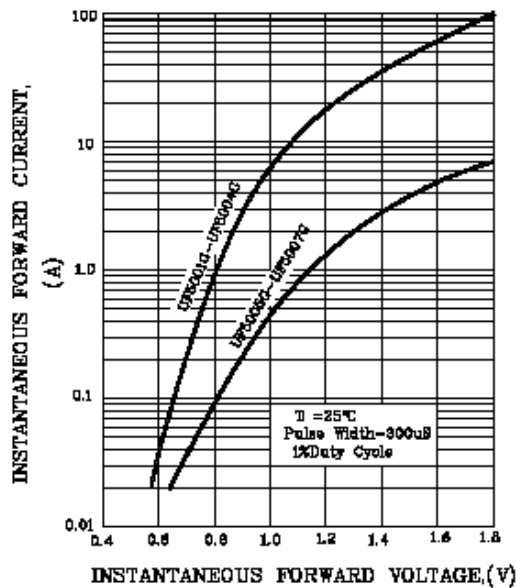


FIG.4-TYPICAL REVERSE CHARACTERISTICS

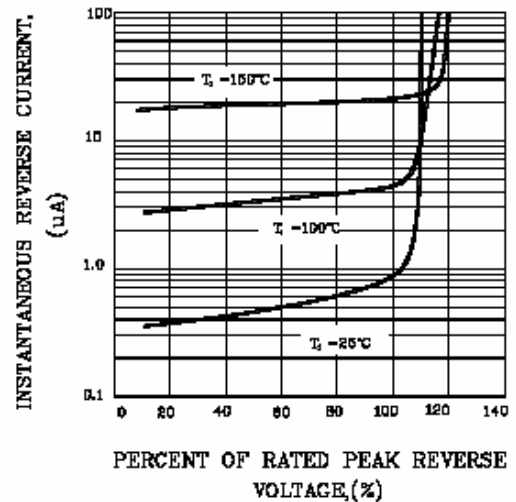


FIG.5-TYPICAL JUNCTION CAPACITANCE

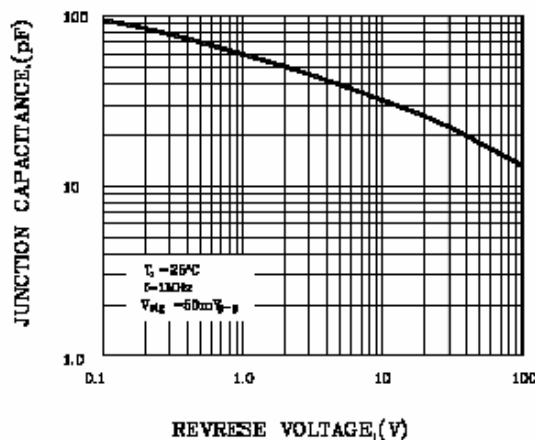


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

