



SOFT FAST RECOVERY RECTIFIER

SFR601 THRU SFR607

VOLTAGE RANGE
CURRENT


50 to 1000 Volts
6.0 Ampere

FEATURES

- Fast switching speed for high efficiency
- Low reverse leakage
- High forward surge current capacity
- High temperature soldering guaranteed:
260 °C /10 seconds, 0.375" (9.5mm) lead length

MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V – 0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E Method 208C
- Mounting position: any
- Weight: 0.07 ounce, 2.0 gram

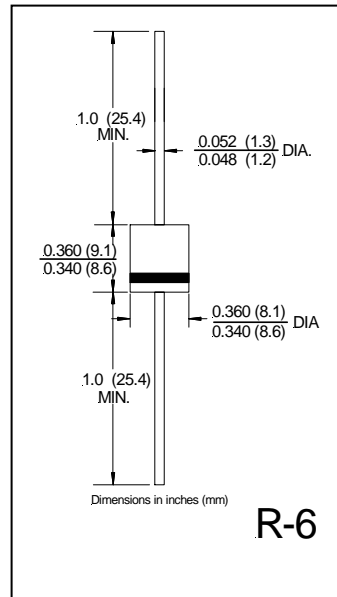

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SFR 601	SFR 602	SFR 603	SFR 604	SFR 605	SFR 606	SFR 607	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length At $T_C = 55^\circ C$	$I_{(AV)}$	6.0							Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	300							Amps
Maximum Instantaneous Forward Voltage @ 6.0A	V_F	1.3							Volts
Maximum DC Reverse Current at Rated $T_A = 25^\circ C$	I_R	25							μA
DC Blocking Voltage per element $T_A = 100^\circ C$		1.0							mA
Maximum Reverse Recovery Time Test conditions $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$	t_{rr}	100	150	200					nS
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	10							$^\circ C/W$
Operating Junction Temperature	T_J	(-55 to +125)							$^\circ C$
Storage Temperature Rang	T_{STG}	(-55 to +150)							$^\circ C$

Notes:

1. Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, PCB mounted, with 1.1 x 1.1" (30 x 30mm) copper heatsink

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

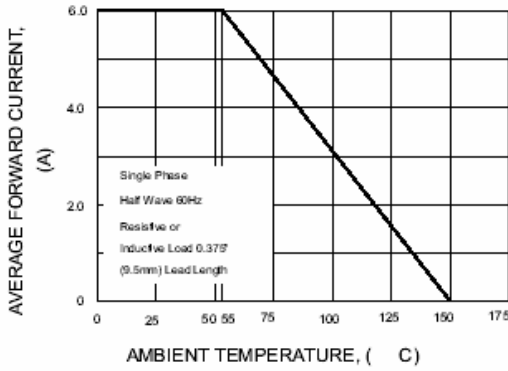


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

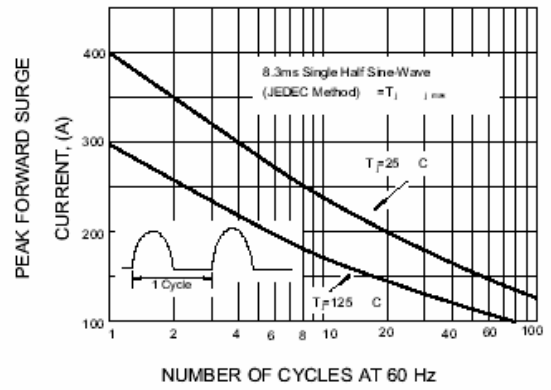


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

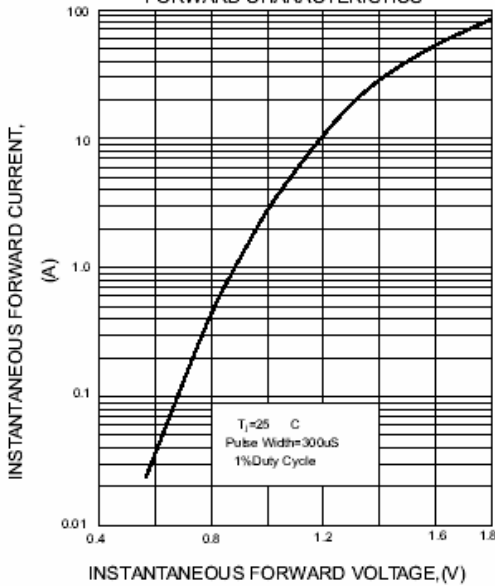


FIG.4-TYPICAL REVERSE CHARACTERISTICS

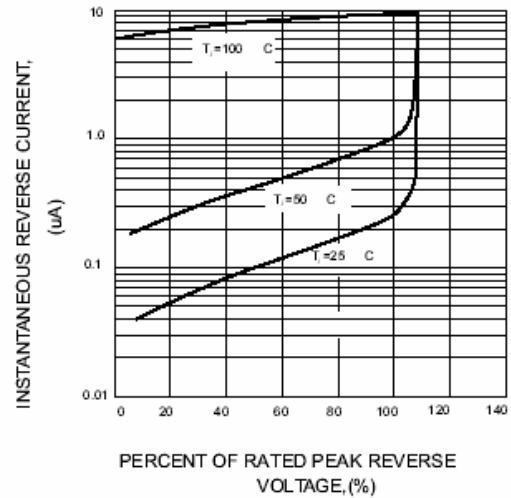


FIG.5-TYPICAL THERMAL RESISTANCE


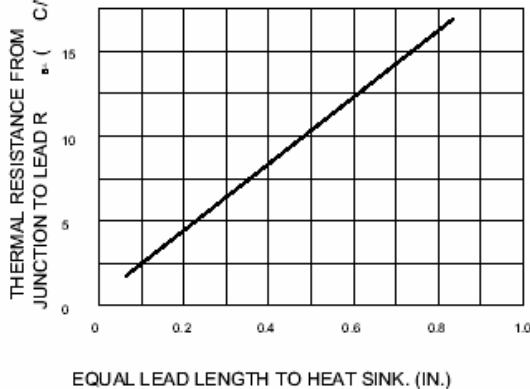


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

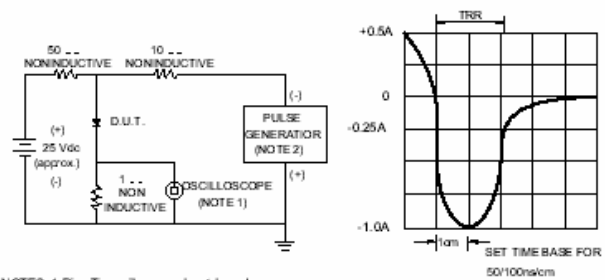

NOTES: 1.Rise Time = 7ns max. Input Impedance = 1 megohm, 22 pF
2.Rise time = 10ns max. Source Impedance = 50 ohms